




Quality. Performance. Value.

535 / 540 / 545 / 550 DM550M10-72HSW/-V



Tier 1

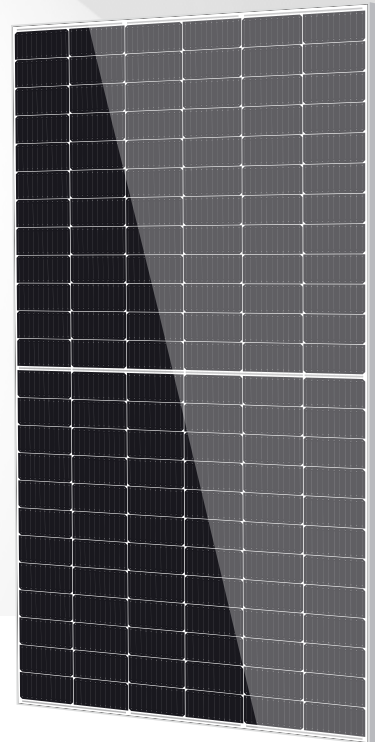

Technology

High module conversion efficiency through superior manufacturing technology



DMEGC cell inside

Over decade cell production experience
Qualified by most of module manufacturers
5G enhanced manufactory



PID Free

Excellent PID resistance according to IEC TS 62804-1



Performance

High performance under low light conditions
(Cloudy days, mornings and evenings)



Quality

Manufactured according to International Quality and Environmental Management Systems(ISO9001,ISO14001)



Value

Assured by the manufacturer who is the very most healthy PV provider



Social responsible

ISO45001 certified Ecovadis silver medal awarded
Low carbon foot print traceable



Service

Local office support ,immediate response

Superior Manufacturing-Quality Assurance




- TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- 100% two EL tests

Visible Quality



- Durable,high-quality
- Rigid construction: 5400Pa & 2400Pa rated assembly

Warranty

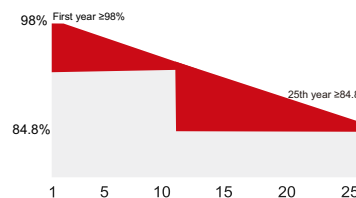

- 12 Years product warranty
- 25 Years power output warranty
- 0.55% Annual Degradation Over 25 years

A Member of the Hengdian Group

Ver:20210706A0


Electrical Specifications

* STC irradiance of 1000W/m² spectrum AM 1.5 and cell temperature of 25°C

Module Type	Pm(W)	Tolerance	Imp(A)	Vmp(V)	Isc(A)	Voc (V)	Module Efficiency
DM535M10-72HSW DM535M10-72HSW-V	535	0/+3%	13.21	40.53	13.61	49.65	20.70%
DM540M10-72HSW DM540M10-72HSW-V	540	0/+3%	13.28	40.69	13.68	49.77	20.89%
DM545M10-72HSW DM545M10-72HSW-V	545	0/+3%	13.35	40.85	13.75	49.89	21.09%
DM550M10-72HSW DM550M10-72HSW-V	550	0/+3%	13.42	41.01	13.82	50.01	21.28%

Mechanical Data

Cell Type	P type Mono-crystalline
Cell Arrangement	144(6x24)
Module Structure	Glass/Encapsulant/Backsheet
Glass Thickness	3.2mm
PV module classification	Class II
Junction Box Rating	IP67/IP68
Cables	4mm ² /1300mm or Customized Length
Connector Type	MC4/MC4 Compatible
Fire Rating Class	Class C

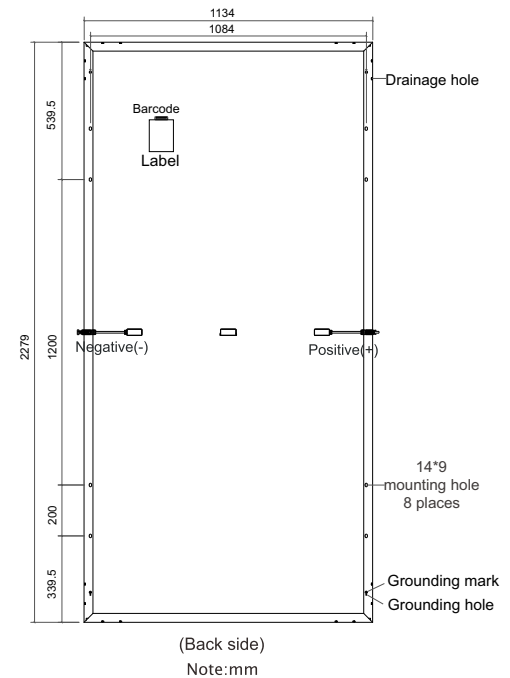

Maximum Ratings



Operating Temperature	-40°C to +85°C
Maximum System Voltage	1000V/1500V DC(IEC)
Maximum Series Fuse Rating	25A
Number of Diodes	3

Packaging

Module Dimensions	2279x1134x35mm
Weight	29.0kg
Container	40' HQ
Pieces per Pallet	31
Pieces per Container	620

Temperature Characteristics

Temperature Coefficient of Isc	+0.0448%/°C
Temperature Coefficient of Voc	-0.246%/°C
Temperature Coefficient of Pmax	-0.330%/°C

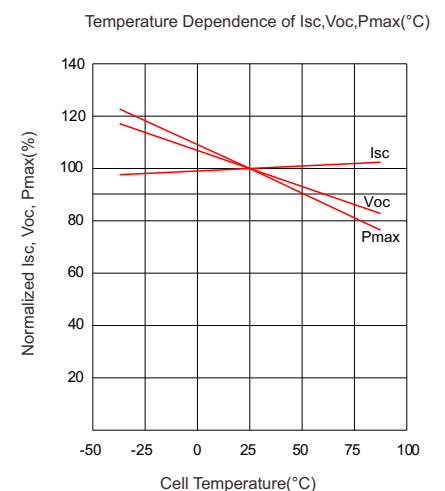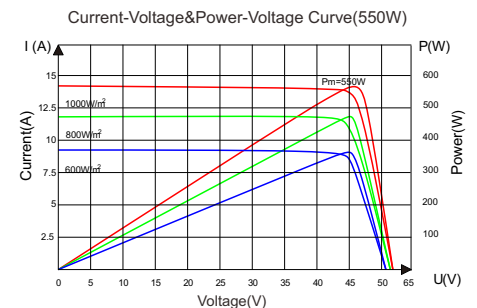

Hengdian Group DMEGC Magnetics Co., Ltd.
Hengdian Industrial Zone, Dongyang City
Zhejiang Province, China 322118

Tel: 0086-579-8658-8825 Fax: 0086-579-8655-4845
Email: solar@dmegc.com.cn
www.chinadmegc.com www.dmegc.solar